





E-Star Power Development Co., Ltd. (E-STAR)  
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
 22069, Taiwan (R.O.C.)  
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**6W USB Charger interchangeable series > APSU06-USB**

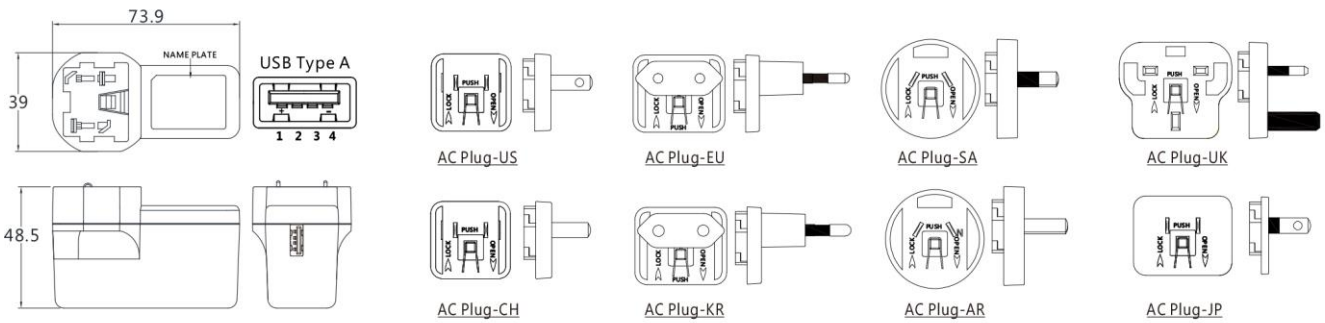

■ Safety agency approvals:

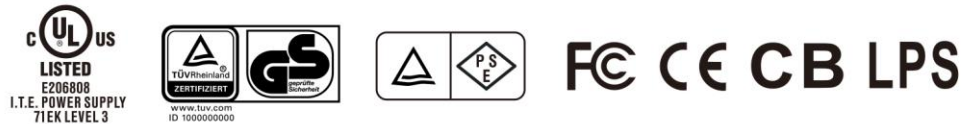

■ Specifications:

Model No.	<b>APSU06-USB</b>
AC input range	100~240VAC; 47~63Hz; 0.2A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~ +70°C (safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A) CE EN 55032, EN 55024 (B) FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D) CB
Warranty	1 year

■ **X = UI:** (American type\_FIG 1) or **EI:** (European type\_FIG 2) or **SAI:** (2pin Australian type\_FIG3) or **BSI:** (British type\_FIG 4) or **CHI:** (Chinese type\_FIG 5) or **KRI:** (Korean type\_FIG 6) or **ARI:** (Argentinian type\_FIG 7) or or **JPI:** (Japanese type\_FIG 8)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
APSU06X-1-USB	5	1.2	6	50	± 0.5	± 5	>75	<0.1	5

Note:

1.Weight: Approx 70~100gs

2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.