



**120W Open Frame type Medical power supply > MBU120**

**MBU120 series**

V1.1

The MBU120 series of AC/DC switching mode power supplies provide 120 Watts of continuous output power. All supplies are UL94V-1 min compliant. All models meet FCC Part-18 class B and CISPR-11 EN55011 class B emission Limits and are designed to comply with UL/c-UL(UL 60601-1:2nd Edition), TUV/T-mark(IEC 60601-1:2nd Edition) and conformity assessment in CE marking. All units are 100% burned in and tested.



**RoHS2**  
2011/65/EU



**120W Open Frame Medical Grade Power Supply**

**FEATURES:**

- \* Wide Operating Voltage, 90 to 260 VAC, 47 to 63 Hz
- \* Single Output
- \* Crowbar Mode Over Voltage Protection
- \* Class I system
- \* Active Power Factor Correction
- \* 5 year warranty

**APPLICATIONS:**

- \* Medical Equipment
- \* Patient Monitor
- \* Ultrasound system
- \* Blood chemistry analyzer
- \* Medical Image

**GENERAL SPECIFICATION:**

- \* **Short Circuit Protection:** Auto Recovery
- \* **Cooling:** Free Air Convection
- \* **Flammability Rating:** UL94V-1
- \* **Protection Classes:** Class I
- \* **Safety:** UL/c-UL(UL 60601-1:2ndEdition), TUV/T-mark(IEC 60601-1:2ndEdition)

**APPROVALS:**



**Electrical Characteristics:**

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
Vins	Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Vin	Input Operate Voltage Range	Detail to see Fig.1	90		260	VAC
Fi	Input Frequency	Sine wave	47		63	Hz
PF	Power Factor Correction		0.95		1	
Po	Output Power Range	See Rating Chart			120	W
Iil	Low Line Input Current	Full Load, Vin=100VAC		1.7		A
Iih	High Line Input Current	Full Load, Vin=240VAC		0.8		A
Irl	Low Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=100VAC			30	A
Irh	High Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=240VAC			60	A
Ik	Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.1	mA
η	Efficiency	Full Load, Vin=230VAC, Detail to see Rating Chart	See Rating Chart			
ΔVoi	Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC			1	%
OVP	Over Voltage Protection		112		132	%
OLP	Over Load Protection	Recovers automatically after fault condition is removed	110		150	%
ttr	Time of Transient Response	Full Load, Vin=110VAC			4	ms
thu	Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
ts	Start-up time	Full Load, Vin=100~240VAC	0.3		2	s
Ris	Insulation Resistance	Primary to Secondary, 500VDC, 25°C/ 70% RH	50			MΩ
Tc	Temperature Coefficient	All Condition			±0.04	%/°C
HV	Dielectric Withstanding Voltage (P-S)	Primary to Secondary, limit current <10mA			4000	VAC
Vpg	Dielectric Withstanding Voltage (P-G)	Primary to PE, limit current <10mA			1500	VAC
EMI	EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

**Environmental:**

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
To	Operating Temperature	Detail to see Fig.2 (Derate linearly from 100% load at 50°C to 50% load at 70°C)	-10		70	°C
Ts	Storage Temperature	10 ~ 95% RH	-40		85	°C
Ho	Operating Humidity	non-condensing	0		95%	RH
Hs	Storage Humidity		0		95%	RH
ESDa	Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
ESDc	Electro Static Discharge	Contact Discharge, IEC61000-4-2			6	kV
MTBF	Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
ELEV	Operating Altitude (Elevation)	All condition			3000	m
VBR	Vibration	10 ~ 500Hz, 10min./1cycle, 60min. each along X, Y, Z axes			5	G
Vsl	Surge Voltage	Line-Neutral			1	kV
Vsg	Surge Voltage	Line-PE & Neutral-PE			2	kV

2018.12



**120W Open Frame type Medical power supply > MBU120**


**MBU120 series**

V1.1


**120W Open Frame Medical Grade Power Supply**

**SPECIFICATION NOTE :**

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing  $\pm 10\%$  of input voltage from nominal line at rated load.
- Load regulation is defined by changing  $\pm 40\%$  of measured output load from 60% rated load.
- The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

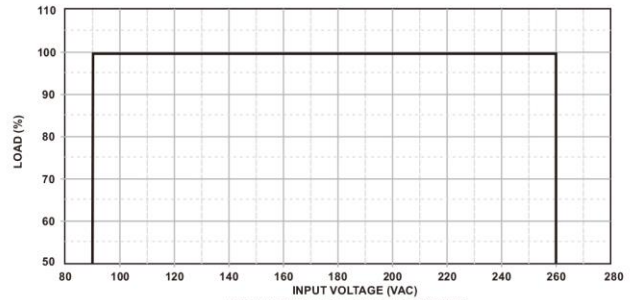


(FIG.1) INPUT VOLTAGE DERATING CURVE

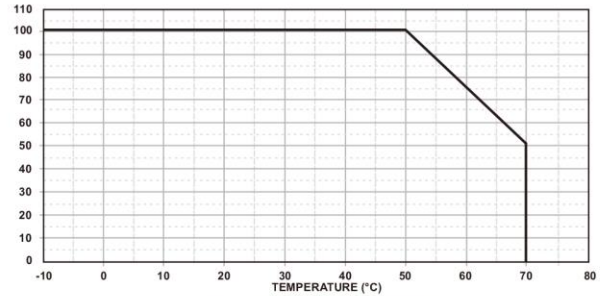

(FIG.2) TEMPERATURE DERATING CURVE

**MECHANICAL DIMENSIONS: ( UNIT: mm [inch] )**

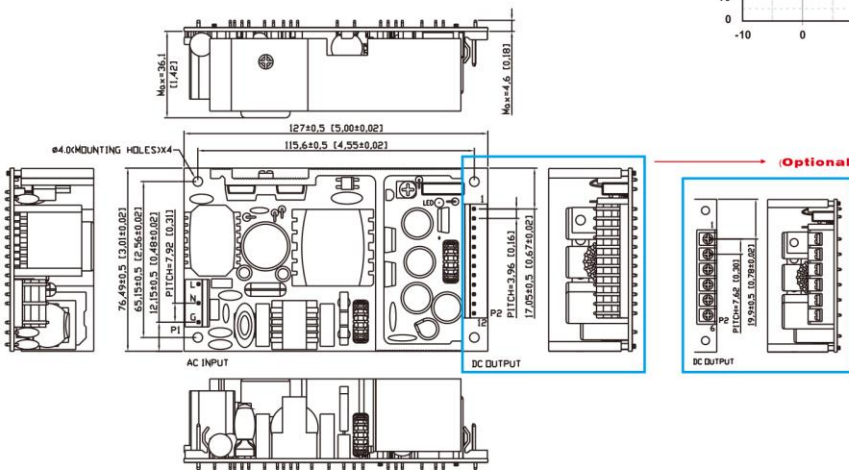

**PACKING :**

- Weight: 365gs approx.
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal.
- Output connector mates with screw terminal (Terminal Block)(16-22AWG) or Molex housing 09-50-3121 and Molex 2478 series crimp terminal.

**PIN CHART**

MODEL	PIN	1	2	3	4	5	6	7	8	9	10	11	12
MBU120-1XX-12PIN		OUT	OUT	OUT	OUT	OUT	OUT	RTN	RTN	RTN	RTN	RTN	RTN

MODEL	PIN	1	2	3	4	5	6
MBU120-1XX-6PIN		OUT	OUT	OUT	RTN	RTN	RTN

**Rating Chart:**

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	min	max	min	max							
	(VDC)	(VDC)	(A)	(A)							
*MBU120-102	5.0	6.0	16.66	20.00	100	100	±7	82.0	0.5	16	Hiccup
*MBU120-103	6.0	9.0	12.22	18.33	110	100	±7	84.0	0.5	16	Hiccup
*MBU120-104	9.0	11.0	10.90	13.33	120	100	±5	86.0	0.5	16	Hiccup
MBU120-105	11.0	13.0	9.23	10.90	120	100	±5	87.2	0.5	16	Hiccup
MBU120-106	13.0	16.0	7.50	9.23	120	100	±5	88.2	0.5	16	Hiccup
*MBU120-107	16.0	21.0	5.71	7.50	120	100	±3	86.1	0.5	16	Hiccup
MBU120-108	21.0	27.0	4.44	5.71	120	100	±3	86.1	0.5	16	Hiccup
*MBU120-109	27.0	33.0	3.63	4.44	120	100	±2	86.1	0.5	16	Hiccup
MBU120-110	33.0	40.0	3.00	3.63	120	100	±2	86.1	0.5	16	Hiccup