



E-Star Power Development Co., Ltd. (E-STAR)
 No.305, Sec. 2, Jhongshan Rd., Banciao City, Taipei County 22067, Taiwan
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

60W U-Bracket type Medical power supply < MUU60-1XX

MUU60 SERIES

63W U-bracket Switching Power Supplies For Medical Equipment.

Description:

The MUU60 series of compact, open frame constructed, AC/DC switching mode power supplies provide 63 Watts of continuous output power . They are suited for use in hospital instrument and many other applications. All models meet FCC Part-18 class B and CISPR-11 EN55011 class B emission Limits and are designed to comply with UL/c-UL(UL 60601-1) ,TUV/T-mark(EN 60601-1) and new CE requirements. All units are 100% burned in and tested.

Features:

- Wide Input Voltage 90 to 264 VAC,47 to 63 Hz
- Internal EMI filter
- Single to Quad Output
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal
- Output connector mates with Molex housing 09-50-3081 and Molex 2478 series crimp terminal
- Output Voltage Available From 3 VDC Thru 40 VDC
- Input Surge Current, Over Voltage and Over Load protection
- Output Voltage Protection(Crowbar Design)
- Power Fail Detect (Optional)
- Class I
- 3 year warranty



Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Input Voltage	Operating Voltage	90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264 VAC	0		63	W
Vo	Output Voltage Range		See rating Chart			V
Io	Output Current Range		See rating Chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			1.6	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			0.8	A
Irl	Low Line Inrush Current	Io=Full load, 25°C,Cool start, Vin=115VAC		15	18	A
Irh	High Line Inrush Current	Io=Full load, 25°C,Cool start, Vin=230VAC		21	25	A
Eff	Efficiency	Io=Full load, Vin=230VAC	70	80	85	%
REG-l	Line Regulation	Io=Full load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	7	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full load, Vin=110VAC	16			mS
Ts	Start Up Time	Io=Full load, Vin=100VAC	0.3	1	2	S
* VP-P	Ripple & Noise (Peak to Peak)	Full load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full load, Vin=240VAC		0.1	0.3	mA
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C

* Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0		70	°C
Tstg	Storage Temperature		-40		85	°C
Hr	Relative Humidity		5		95	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1			MHrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5600			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2800			VDC
Ris	Isolation Resistance	Test Voltage=2100VDC	50			MΩ
CISPR	EMI requirements for CISPR-11	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-18	Vin=110VAC	B			CLASS



E-Star Power Development Co., Ltd. (E-STAR)
 No.305, Sec. 2, Jhongsan Rd., Banciao City, Taipei County 22067, Taiwan
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

60W U-Bracket type Medical power supply < MUU60-1XX

MUU60 SERIES


**63W U-bracket Switching Power Supplies For Medical Equipment.
 Output Voltage And Current Rating Chart (Single Output) :**

Model Number	Output Voltage	Output Current	Total Regulation	Maximum Output Power
MUU60-101	3 - 5 VDC	16.66 - 10.0 A	7%	50W
MUU60-102	5 - 6 VDC	11.0 - 9.16 A	7%	55W
MUU60-103	6 - 8 VDC	10.0 - 7.50 A	5%	60W
MUU60-104	8 - 11 VDC	7.87 - 5.72 A	5%	63W
MUU60-105	11 - 13 VDC	5.72 - 4.84 A	5%	63W
MUU60-105-1	11 - 13 VDC	4.09 - 3.46 A	5%	45W
MUU60-106	13 - 16 VDC	4.84 - 3.93 A	5%	63W
MUU60-107	16 - 21 VDC	3.93 - 3.00 A	5%	63W
MUU60-108	21 - 27 VDC	3.00 - 2.33 A	5%	63W
MUU60-109	27 - 33 VDC	2.33 - 1.90 A	5%	63W
MUU60-110	33 - 40 VDC	1.90 - 1.57 A	2%	63W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Output #4				Maximum Output Power
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	
MUU60-200	+3.3V	1.4A	7A	6%	+12V	0.6A	3A	5%									59.1W
MUU60-201	+5V	0.7A	7A	5%	+12V	0.3A	3A	5%									63W
MUU60-202	+5V	0.7A	7A	5%	+15V	0.3A	3A	5%									63W
MUU60-203	+5V	0.7A	7A	5%	+24V	0.4A	2A	5%									63W
MUU60-204	+3.3V	1.4A	7A	6%	+5V	0.5A	5A	5%									48.1W
MUU60-215	+5V	0.7A	7A	5%					-24V	0.2A	2A	5%					63W
MUU60-300	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W
MUU60-300-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W
MUU60-301	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-5V	0A	0.8A	5%					63W
MUU60-301-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+5V	0A	0.8A	5%					63W
MUU60-302	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W
MUU60-302-1	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W
MUU60-303	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%					63W
MUU60-303-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%					63W
MUU60-305	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	-12V	0A	0.8A	5%					63W
MUU60-305-1	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	+12V	0A	0.8A	5%					63W
MUU60-306	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-5V	0A	0.8A	5%					59.8W
MUU60-306-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+5V	0A	0.8A	5%					59.8W
MUU60-308	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	-12V	0A	1A	5%					53.5W
MUU60-308-1	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	+12V	0A	1A	5%					53.5W
MUU60-400	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-400-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
MUU60-400-2	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-400-3	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
MUU60-401	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-401-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
MUU60-401-2	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-401-3	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
MUU60-402	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W
MUU60-402-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W
MUU60-402-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W
MUU60-402-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W
MUU60-403	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W
MUU60-403-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W
MUU60-403-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W
MUU60-403-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W
MUU60-404	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-404-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W
MUU60-404-2	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W
MUU60-404-3	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W

Mechanical Specifications :

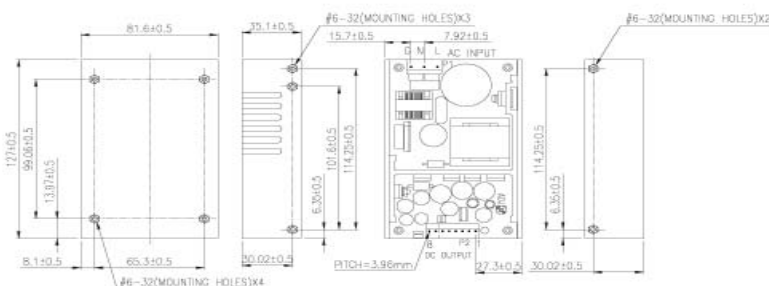

PIN CHART

MODEL	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8 (Optional)
MUU60-1XX	OUT	OUT	OUT	RTN	RTN	RTN	RTN	PFD
MUU60-2XX	Vo2	Vo1	Vo1	COM	COM	N/C	N/C	PFD
MUU60-215	N/C	Vo1	Vo1	COM	COM	Vo3	N/C	PFD
MUU60-3XX	Vo2	Vo1	Vo1	COM	COM	Vo3	N/C	PFD
MUU60-4XX	Vo2	Vo1	Vo1	COM	COM	Vo3	Vo4	PFD

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3 Vo4:Output#4

Note:

1. Dimensions are shown in mm.
2. Weight: 425gs approx.
3. Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3081 and Molex 2478 series crimp terminal.