



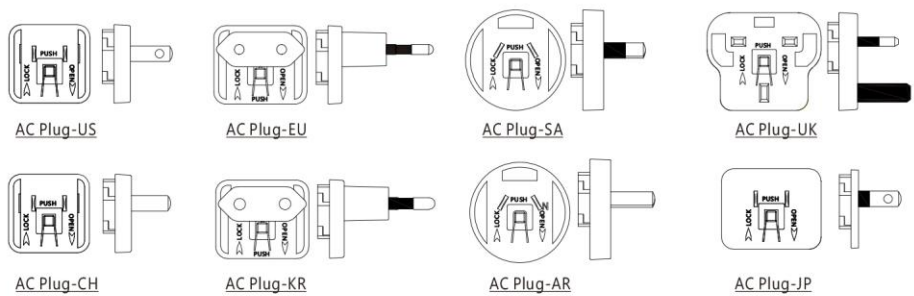

E-Star Power Development Co., Ltd. (E-STAR)  
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
 22069, Taiwan (R.O.C.)  
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**6W Wall Mount interchangeable Medical power supply > GMPU06-USB**

UNIT:mm

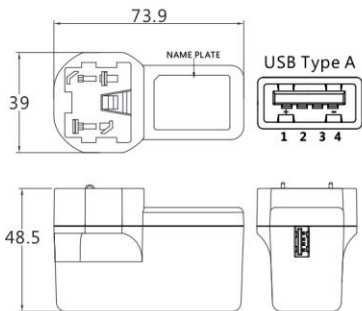

■ Safety agency approvals:



■ Specifications:

Model No.	<b>GMPU06-USB</b>
AC input range	100~240VAC; 47~63Hz; 0.18~0.09A
Leakage current	0.1mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	5656VDC from input to output
EMC	(A)CE: EN60601-1-2 (B)FCC Part 15 / Part 18 CLASS B
Safety	(A)UL/cUL (B)TUV/GS (C)TUV/PSE
Warranty	2 years

■ **X= UI:** (American type\_FIG 1) or **EI:** (European type\_FIG 2) or **SAI:** (2pin Australian type\_FIG3) or **BSI:** (British type\_FIG 4) or **CHI:** (Chinese type\_FIG 5) or **KRI:** (Korean type\_FIG 6) or **ARI:** (Argentinian type\_FIG 7) or or **JPI:** (Japanese type\_FIG 8)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
GMPU06X-0-USB	3~5	1.33~0.80	4	50	±1	±7	>71.9	<0.1	3.3
GMPU06X-1-USB	5~6	1.00~0.80	5	50	±1	±5	>73.62	<0.1	5
GMPU06X-1-1-USB	6~8	1.00~0.75	6	80	±1	±5	>78.88	<0.1	7.5
GMPU06X-2-USB	8~11	0.75~0.54	6	80	±1	±5	>78.88	<0.1	9
GMPU06X-3-USB	11~13	0.54~0.46	6	100	±1	±3	>78.88	<0.1	12
GMPU06X-4-USB	13~16	0.46~0.37	6	120	±1	±3	>78.88	<0.1	15
GMPU06X-5-USB	16~21	0.37~0.28	6	150	±1	±3	>78.88	<0.1	18
GMPU06X-6-USB	21~27	0.28~0.20	6	180	±1	±2	>78.88	<0.1	24
GMPU06X-7-USB	27~33	0.20~0.18	6	200	±1	±2	>78.88	<0.1	28
GMPU06X-8-USB	33~58	0.18~0.12	6	200	±1	±2	>78.88	<0.1	48

Note:

1.Weight: Approx 90~110gs

2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.