



E-Star Power Development Co., Ltd. (E-STAR)  
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
 22069, Taiwan (R.O.C.)  
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**60W Desktop Power Supply < A2-60**

**A2-60** 60W Desktop series

DoE(VI)&EU ErP/CoC(5)

UNIT:mm



FIG 1: IEC-320-C14



FIG 2: IEC-320-C8



FIG 3: IEC-320-C6


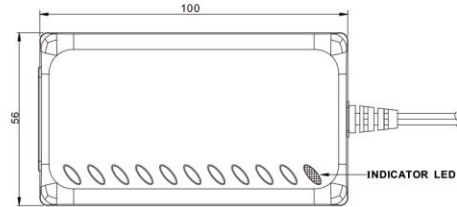


FIG 1(V)




FIG 2(U)




FIG 3(W)



■ Safety agency approvals:



CE LPS

■ Specifications:

Model No.	<b>A2-60</b>
AC input range	100~240VAC; 47~63Hz; 1.5A
Leakage current	ClassI: 3.5mA / ClassII: 0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C (safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN 55032, EN 55024 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D) CB
Warranty	1 year

X= V: (IEC-320-C14 FIG 1) or U: (IEC-320-C8 FIG2) or W: (IEC-320-C6 FIG3)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV)max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI),CoC(5)	No load Power Consumption(W)
A2-60S12R-X	12	5.0	60	250	±2	±5	>88	<0.15
A2-60S12R-X	12.5	4.80	60	250	±2	±5	>88	<0.15
A2-60S12R-X	13	4.61	60	250	±2	±5	>88	<0.15
A2-60S12R-X	13.5	4.44	60	250	±2	±5	>88	<0.15
A2-60S12R-X	14	4.28	60	250	±2	±5	>88	<0.15
A2-60S12R-X	14.5	4.13	60	250	±2	±5	>88	<0.15
A2-60S12R-X	15	4.0	60	250	±2	±5	>88	<0.15
A2-60S12R-X	15.5	3.87	60	250	±2	±5	>88	<0.15
A2-60S12R-X	16	3.75	60	250	±2	±5	>88	<0.15
A2-60S12R-X	16.5	3.63	60	250	±2	±5	>88	<0.15
A2-60S12R-X	17	3.52	60	250	±2	±5	>88	<0.15
A2-60S18R-X	18	3.33	60	300	±2	±5	>88	<0.15
A2-60S18R-X	18.5	3.24	60	300	±2	±5	>88	<0.15
A2-60S18R-X	19	3.15	60	300	±2	±5	>88	<0.15
A2-60S18R-X	19.5	3.07	60	300	±2	±5	>88	<0.15
A2-60S18R-X	20	3.0	60	300	±2	±5	>88	<0.15
A2-60S18R-X	20.5	2.92	60	360	±2	±5	>88	<0.15
A2-60S18R-X	21	2.85	60	360	±2	±5	>88	<0.15
A2-60S18R-X	21.5	2.79	60	360	±2	±5	>88	<0.15
A2-60S18R-X	22	2.72	60	360	±2	±5	>88	<0.15
A2-60S18R-X	22.5	2.66	60	360	±2	±5	>88	<0.15
A2-60S18R-X	23	2.60	60	360	±2	±5	>88	<0.15
A2-60S18R-X	23.5	2.55	60	360	±2	±5	>88	<0.15
A2-60S18R-X	24	2.50	60	360	±2	±5	>88	<0.15

Note:

- 1.Weight:Approx 250gs
- 2.Optional output connectors (See appendix A)
- 3.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.
- 4.Standard Output cable: 12~21V: UL2468, 16AWG,1M  
21~24V: UL2468, 18AWG,1M