



E-Star Power Development Co., Ltd. (E-STAR)
 No.305, Sec. 2, Jhongshan Rd., Banciao City, Taipei County 22067, Taiwan
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

120~150W Desktop power supply < LTE150E-SX

Features:

Universal Input from 100Vac~240Vac 50/60Hz
 Desk type & 120~150W Single Output
 With LED Indicator Light

Input/Output Specification:

Input Voltage: AC 100V~240V 50/60Hz
 Output Power: 120W~150W
 Output Voltage: 12V, 15V, 19V, 24V, 30V, 48V, 56V
 Voltage Regulation: ±5%
 AC Socket: IEC320-C14, IEC320-C6





Model No.	LTE150E-SX
AC input voltage range	100~240VAC, 50/60Hz
Overload protection	120%~150% of rated load
Over Current Protection	110% < I < 200%
Over voltage protection	160% Max.
Short Protection	Auto recovery
Withstand voltage	@2121Vdc , 1 Minute from Input(L1&L2) to Output ----- < 10mA @2121Vdc , 1 Minute from Input(L1&L2) to Earth ----- < 10mA
Working temperature	0~40°C
Storage Temperature	-40~85°C
Operating Relative Humidity	5~95% RH
No Load Standby Power	0.5W max. @ 120Vac
Safety standards	UL, cUL, TUV, PSE
EMC standards	FCC, CE
Dimension (L*W*H) (mm)	183x 76 x 40 m m
Insulation Resistance	100MΩ min. @ DC500V
P/No.	Output
LTE150E-S2	12.0VDC , 10A
LTE150E-S3	15.0VDC , 10A
LTE150E-SW	19.0VDC , 7.9A
LTE150E-S4	24.0VDC , 6.25A
LTE150E-SR	30.0VDC , 5A
LTE150E-S5	48.0VDC , 3.125A
LTE150E-S7	56.0VDC , 2.68A



E-Star Power Development Co., Ltd. (E-STAR)
No.305, Sec. 2, Jhongshan Rd., Banciao City, Taipei County 22067, Taiwan
Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

120~150W Desktop power supply < LTE150E-SX

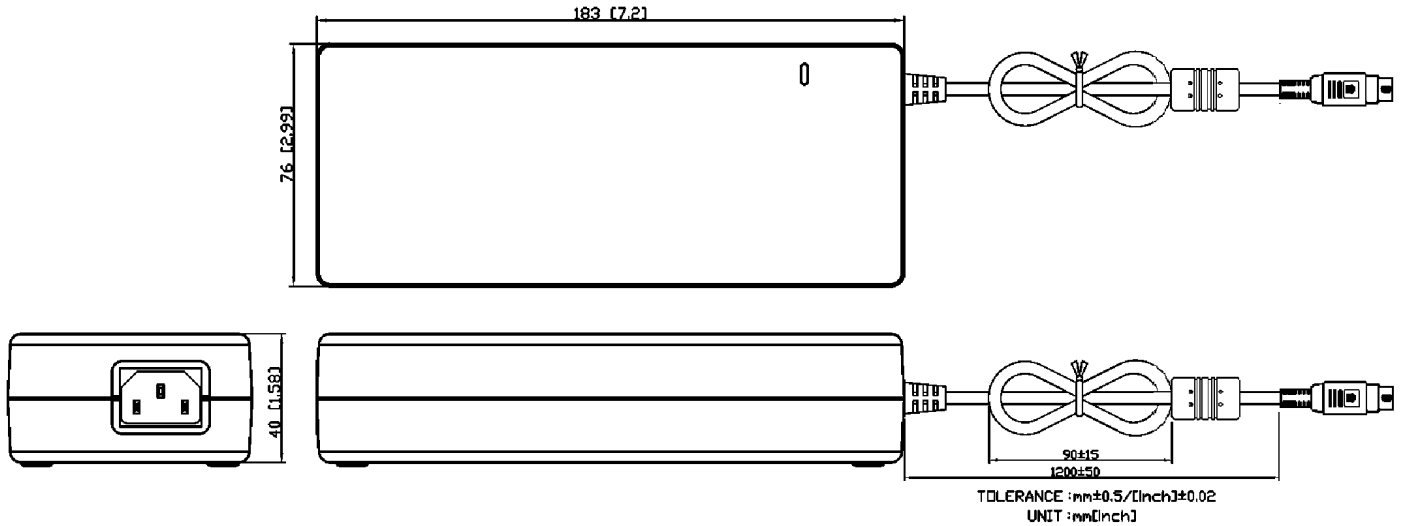

IEC C6



IEC C14