



E-Star Power Development Co., Ltd. (E-STAR)

No.305, Sec. 2, Jhongsan Rd., Banciao City, Taipei County 22067, Taiwan


Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

15W Wall Mount power supply < PA1015-DU/E/B/A/C

15W wall mount / plug-in switching power

Features:

Over-Voltage Protection
 Over-Current Protection
 Limit current Protection(Optional)
 Short-circuit Protection
 Hi-pot & 100% ATE(Chroma)Tested
 100%Burn-in under High
 Ambient Temperature(45℃)
 Low Ripple/Noise
 MTBF Above 50000 HRS At 25℃
 LVD authentication
 Limited Power Sources(LPS)
 CEC IV Efficiency
 Regulations Compliance
 Cispr 22 CLASS B,VCCI CLASS B,
 FCC Part15 CLASS B, Compliance

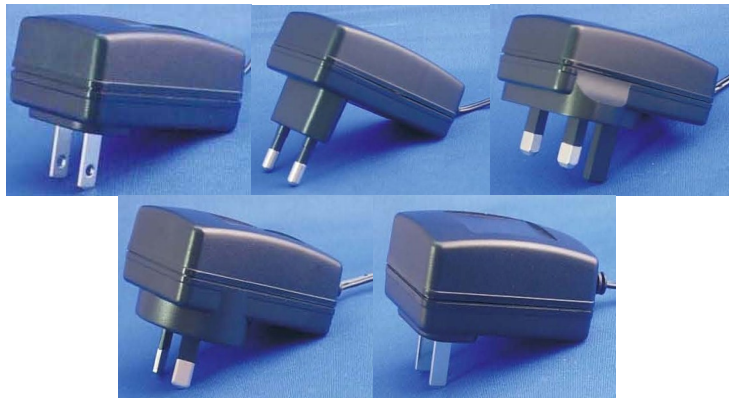

Model No.

PA1015-xxxDxB

AC input voltage range

100~240VAC / 50~60Hz

AC inrush current (max.)

40A Max.

Over Load Protection

Auto Recovery

Short Protection

Auto Recovery

Withstand voltage

I/P - O/P: 3K Vac

Working temperature

0~40℃ full load , de-rating : 41~50 ℃ 3% / ℃.

Storage Temperature

-20℃ ~ +85℃

Operating Relative Humidity

5% to 90% non-condensing

No Load Standby Power

No load power consumption less than 0.5 W

Safety standards

CB,UL,CUL,GS,PSE,C-Tick,CCC,CEC

EMC standards

CE,FCC,BSMI

ModelNo.	PA1015-1DxB		PA1015-2DxB		PA1015-3DxB	
P/No.	PA1015-030DxB~PA1015-070DxB		PA1015-071DxB~PA1015-149DxB		PA1015-150DxB~PA1015-300DxB	
Output V	3V~4.5V	4.6V~7.0V	7.1V~10.0V	10.1V~14.9V	15.0V~21.0V	21.1V~30.0V
Output Current	2.6A	2.6A	2.15A	1.48A	1A	0.72A
Output Watt	15W	15W	15W	15W	15W	15W

x=U / US type , x=E / Europe type , x=B / British , x=A / Australia , x=C / China type



E-Star Power Development Co., Ltd. (E-STAR)
No.305, Sec. 2, Jhongsan Rd., Banciao City, Taipei County 22067, Taiwan
Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

15W Wall Mount power supply < PA1015-DU/E/B/A/C

