



E-Star Power Development Co., Ltd. (E-STAR)

No.305, Sec. 2, Jhongshan Rd., Banciao City, Taipei County 22067, Taiwan


Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**15W Wall Mount power supply < PA1015-SU/E/B/A**

**15W wall mount / plug-in switching power**

**Features:**

Over-Voltage Protection  
 Over-Current Protection  
 Limit current Protection(Optional)  
 Short-circuit Protection  
 Hi-pot & 100% ATE(Chroma)Tested  
 100%Burn-in under High Ambient Temperature(45℃)  
 Low Ripple/Noise  
 MTBF Above 50000 HRS At 25℃  
 LVD authentication  
 Limited Power Sources(LPS)  
 CEC IV Efficiency  
 Regulations Compliance  
 Cispr 22 CLASS B,VCCI CLASS B,  
 FCC Part15 CLASS B, Compliance

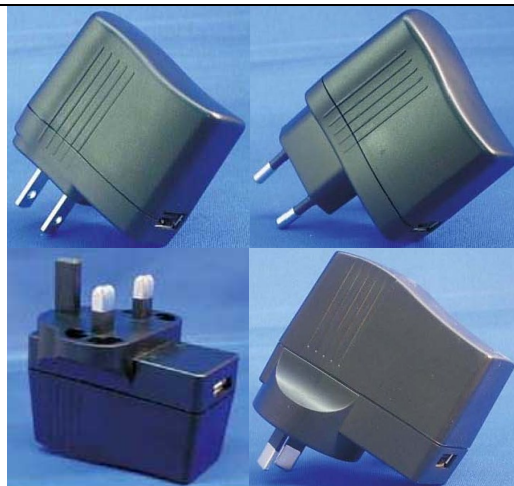

**Model No.**

PA1015-xxxSxB

**AC input voltage range**

100~240VAC / 50~60Hz

**AC inrush current (max.)**

40A Max.

**Over Load Protection**

Auto Recovery

**Short Protection**

Auto Recovery

**Withstand voltage**

I/P - O/P: 3K Vac

**Working temperature**

0~40℃ full load , de-rating : 41~50 ℃ 3% / ℃.

**Storage Temperature**

-20℃ ~ +85℃

**Operating Relative Humidity**

5% to 90% non-condensing

**No Load Standby Power**

No load power consumption less than 0.5 W

**Safety standards**

CB,UL,CUL,GS,PSE,C-Tick,CEC

**EMC standards**

CE,FCC,BSMI

ModelNo.	PA1015-1SxB		PA1015-2SxB		PA1015-3SxB	
P/No.	PA1015-030SxB~PA1015-070SxB		PA1015-071SxB~PA1015-149SxB		PA1015-150SxB~PA1015-300SxB	
Output V	3V~4.5V	4.6V~7.0V	7.1V~10.0V	10.1V~14.9V	15.0V~21.0V	21.1V~30.0V
Output Current	2.6A	2.6A	2.15A	1.48A	1A	0.72A
Output Watt	15W	15W	15W	15W	15W	15W

**x=U / US type , x=E / Europe type , x=B / British , x=A / Australia**



E-Star Power Development Co., Ltd. (E-STAR)  
No.305, Sec. 2, Jhongshan Rd., Banciao City, Taipei County 22067, Taiwan  
Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**15W Wall Mount power supply < PA1015-SU/E/B/A**

