



**16~36W Travel Power Supply > EA1024**

**Features**

- 100-240VAC Universal Input
- LPS Compliance
- Protections:  
 Short circuit / Over voltage / Over current
- Energy Efficiency Level VI or CoC Tier II
- No Load Power Consumption  $\leq 0.1W$  (VI),  $\leq 0.075W$  (Tier II)
- MTBF > 100,000 hours

**EA1024 X R - vv PP**

- X:** Output range  
**R:** Interchangeable AC plug:  
 • U: USA • E: EU • K: UK • A: SAA • C: China  
 • S: South Africa • B: Korea • I: India  
**vv:** Specified output voltage, i.e. 12 is 12VDC  
**PP:** DC plug type, i.e. Code 01 for 5.5x2.1mm  
 or other options (refer to the appendix page)



MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EA1024AR	16W	5~8V	0A	2.0A	± 5%	± 1%	100mV
EA1024BR	20W	5~8V	0A	3.0A	± 5%	± 1%	100mV
EA1024CR	24W	5~8V	0A	4.0A	± 5%	± 1%	100mV
EA1024DR	18W	9~11V	0A	1.5A	± 5%	± 1%	250mV
EA1024ER	24W	9~11V	0A	2.0A	± 5%	± 1%	250mV
EA1024FR	27W	9~11V	0A	3.0A	± 5%	± 1%	250mV
EA1024GR	20W	12~17V	0A	1.66A	± 5%	± 1%	250mV
EA1024HR	30W	12~17V	0A	2.5A	± 5%	± 1%	250mV
EA1024JR	24W	18~24V	0A	1.33A	± 5%	± 1%	350mV
EA1024KR	30W	18~24V	0A	1.66A	± 5%	± 1%	350mV
EA1024MR	20W	36~48V	0A	0.55A	± 5%	± 1%	480mV
EA1024NR	30W	36~48V	0A	0.83A	± 5%	± 1%	480mV
EA1024PR	36W	12V	0A	3.0A	± 5%	± 1%	250mV
EA1024QR	24W	12V	0A	2.0A	± 5%	± 1%	250mV
EA1024RR	36W	24V	0A	1.5A	± 5%	± 1%	350mV

**NOTE:**

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
- 2 : Line regulation is defined by changing  $\pm 10\%$  of input voltage from nominal line at rated load.
- 3 : Max. Power (W)  $\geq V_o \times I_o$

**Electrical Specification**

**INPUT**

- Input Range: 100 to 240 VAC
- Frequency: 50 to 60Hz
- Input Current:  $\leq 1.0A$
- Inrush Current: 30A/100VAC 60A/230VAC
- Hold Up Time:  $\geq 8.3ms$
- Turn On Time:  $\leq 3s$

**OUTPUT**

- Short Circuit Protection: Auto Recovery
- Over Voltage Protection: Latch-off
- Over Current Protection: Auto Recovery


**ENVIRONMENT**

- Operating Temperature: 0 to 40°C
- Storage Temperature: -20 to 85°C
- Operating Humidity: 10% to 90%
- Storage Humidity: 5% to 95%

**SAFETY**

- Certified for whole series: UL/cUL 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC, CE
- Certified for assigned models: CCC, BSMI, PSE, RCM, KC, BIS, CU, PSB, NRCAN

**Mechanical Specification**

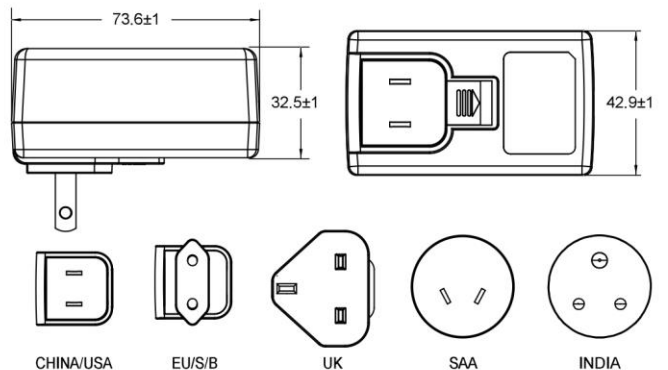

- Case Size: 73.6L x 42.9W x 32.5H (mm)
- AC Plug: U: USA, E: EU, K: UK, A: SAA, C: China  
 S: South Africa, B: Korea, I: India
- Weight: 200g