



E-Star Power Development Co., Ltd. (E-STAR)  
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
 22069, Taiwan (R.O.C.)  
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**10W Travel Power Supply > TRG10R**



**Features**

- \* Universal Input: 90~264Vac
  - \* Continuous Short Circuit Protection
  - \* Interchangeable AC Plugs
  - \* EMI Meets EN55032 Class "B" and CISPR/FCC Class B
  - \* Over Voltage Protection
  - \* No Load Power Consumption < 75mW
  - \* Approved IEC/EN/UL62368-1
  - \* Meet CoC V5 Tier 2 & DoE Level VI
- (Output cable length ≤ 1800mm)



**Ordering information**

TRG10RXXX - XX E XX  
 Model No. DC Plug Type With OVP DC Cable Length and Type

01: 720mm  
 02: 1220mm  
 03: 1800mm

11: 720mm with Ferrite Core  
 12: 1220mm with Ferrite Core  
 13: 1800mm with Ferrite Core

\* 18AWG / UL1185 for Vo: 5V, 5.9V, 6V, 7.5V, 9V  
 \* 20AWG / UL1185 for Vo: 12V, 13.6V  
 \* 22AWG / UL1185 for Vo: 15V, 18V  
 \* 24AWG / UL1185 for Vo: 24V

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	AVG. EFF.
TRG10R050	5V	1600mA	50mV	±2%	±1%	±4%	77.37%
TRG10R059	5.9V	1500mA	1%	±2%	±1%	±3%	78.12%
TRG10R060	6.0V	1500mA	1%	±2%	±1%	±3%	81.57%
TRG10R075	7.5V	1200mA	1%	±2%	±1%	±3%	81.57%
TRG10R090	9V	1100mA	1%	±2%	±1%	±2%	82.14%
TRG10R120	12V	850mA	1%	±2%	±1%	±2%	82.32%
TRG10R136	13.6V	750mA	1%	±2%	±1%	±2%	82.32%
TRG10R150	15V	700mA	1%	±2%	±1%	±2%	82.49%
TRG10R180	18V	550mA	1%	±2%	±1%	±2%	82.14%
TRG10R240	24V	400mA	1%	±2%	±1%	±2%	81.96%

Specifications are subject to change without notice.



**10W Travel Power Supply > TRG10R**

**Specifications**

**INPUT SPECIFICATIONS:**

Voltage .....	90~264Vac
	120~370Vdc
Frequency .....	47 to 63Hz
Input Current .....	0.4A max.
Inrush Current .....	40A max. @240Vac
Conducted EMI .....	CISPR/FCC Class B
Leakage Current .....	0.25mA max.

**OUTPUT SPECIFICATIONS:**

Holdup Time .....	10mS typ. @115Vac
Short Circuit Protection .....	Continuous(Auto Recovery)
Over Voltage Protection .....	TVS Component to Clamp
Temperature Coefficient .....	±0.05%/°C


**GENERAL SPECIFICATIONS:**

Isolation .....	Input to output = 4,242VDC
Operating Temperature .....	-20 ~ 60°C (see Derating Curve)
Storage Temperature .....	-20~85°C
Humidity .....	93% RH max. Non condensing
Cooling .....	Natural Convection
Switching Frequency .....	67KHz typ.
MTBF .....	MIL-HDBK-217F, GB, 25°C/115VAC ..... 200K hrs min.
Altitude .....	2000m
Dimensions .....	2.858x1.823x1.402Inches (72.6x46.3x35.6mm)
Weight .....	130g(0.29 Pounds)

**SAFETY AND EMC:**

Emission and Immunity .....	EN55032 Class B, FCC Part 15 Class B
	EN61000-6-3, EN61000-3-2, EN61000-3-3
	EN55024, EN61204-3, EN61000-6-1
Safety .....	Class II, IEC/EN/UL62368-1/609501-1

**TRG10R Series Derating Curve**

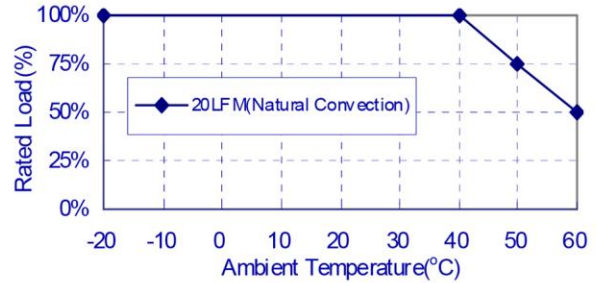


**NOTE:**

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measuring @20MHz BW.
2. Voltage setpoint at 60% full load.
3. Line regulation is measured from 100Vac to 240Vac with full load.
4. Load regulation is measured from 60% to full load and from 60% to 20% load (60% +/- 40% load).

**Mechanical Specification**

All Dimensions are in inches(mm)  
 Tolerance:Inches:X.XXX±0.02  
 Millimeters:X.XX±0.5  
 UNIT: inches(mm)

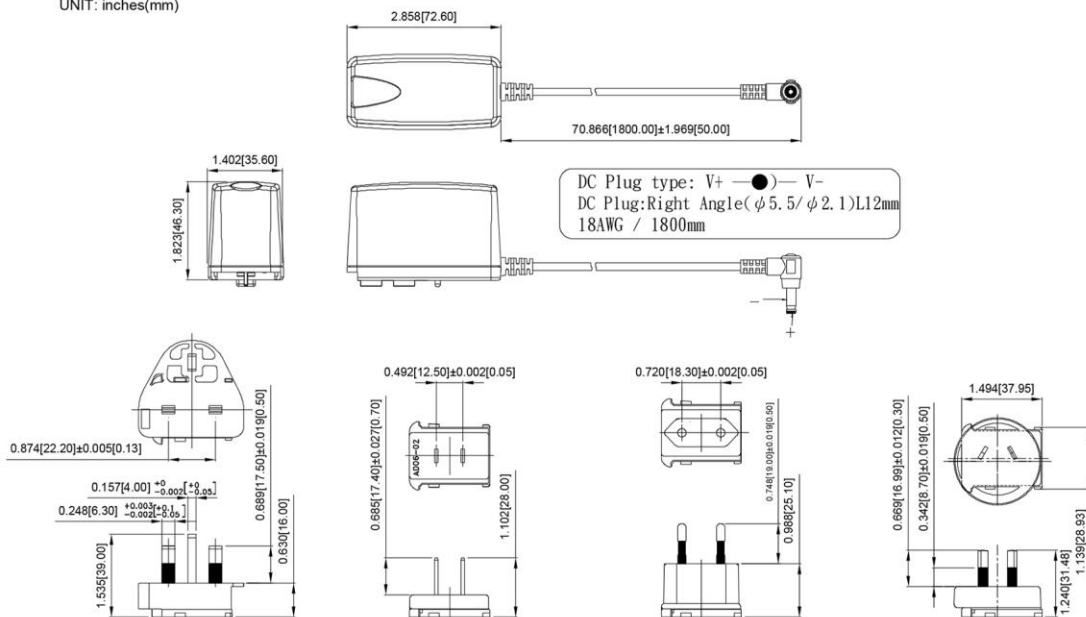

Typical at 25°C, nominal line and 75% load, unless otherwise Specified