



E-Star Power Development Co., Ltd. (E-STAR)


1F, No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City
22069, Taiwan (R.O.C.)

Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

100W Module DC to Dc power supply > CQB100W

FEATURES

- * 100W Isolated Output
- * Quarter-Brick Package
- * 4:1 Input Range
- * Efficiency to 88%
- * Regulated Output
- * Input Under Voltage Protection
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Remote ON/OFF
- * 1500VDC Isolation
- * Safety Meets UL60950-1

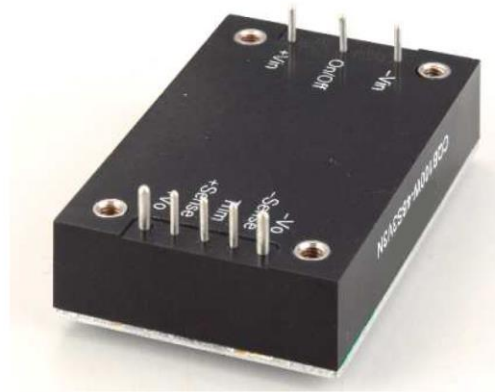

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CQB100W-24S3V3	9-36VDC	3.3VDC	0mA	30 A	120mA	4797mA	86	10000µF
CQB100W-24S05	9-36VDC	5.0VDC	0mA	20 A	120mA	4817mA	86.5	10000µF
CQB100W-24S12	9-36VDC	12 VDC	0mA	8.3A	80mA	4798mA	86.5	2200µF
CQB100W-24S15	9-36VDC	15 VDC	0mA	6.7 A	80mA	4841mA	86.5	2200µF
CQB100W-24S24	9-36VDC	24 VDC	0mA	4.17 A	80mA	4793mA	87	2200µF
CQB100W-48S3V3	18-75VDC	3.3VDC	0mA	30 A	60mA	2344mA	88	10000µF
CQB100W-48S05	18-75VDC	5.0VDC	0mA	20 A	60mA	2367mA	88	10000µF
CQB100W-48S12	18-75VDC	12 VDC	0mA	8.3A	30mA	2358mA	88	2200µF
CQB100W-48S15	18-75VDC	15 VDC	0mA	6.7 A	30mA	2379mA	88	2200µF
CQB100W-48S24	18-75VDC	24 VDC	0mA	4.17 A	30mA	2369mA	88	2200µF

NOTE: 1. Nominal Input Voltage 24, 48VDC



100W Module DC to Dc power supply > CQB100W

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	9 - 36V
	48V	18 - 75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under voltage lockout	24Vin power up	8.8V typ.
	power down	8V typ.
	48Vin power up	17V typ.
	power down	16V typ.
Input Filter	Pi Type	
Positive Logic Remote ON/OFF (See Note 4 & 5)		

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.5% max.
Transient Response: 75% to 100% Step Load Change	
Error Band	3.3V±7% Vout, Others±5% Vout
Recover Time	<500us
External Trim Adj. Range (Note6)	±10%
Ripple and Noise, 20MHz BW (see note 3).	
3.3V & 5V	40mV RMS, 100mV pk-pk max.
12V & 15V	60mV RMS, 150mV pk-pk max.
24V	100mV RMS, 240mV pk-pk max.
Temperature Coefficient	±0.03%/C max.
Short Circuit Protection	Continuous
Line Regulation (Note 1)	±0.2% max.
Load Regulation (Note 2)	±0.2% max.
Over Voltage Protection Trip Range, %Vo nom.	115-140%
Current Limit	110%-160% Nominal Output
Start up time	120ms typ.

GENERAL SPECIFICATIONS:


Efficiency	See Table
Isolation Voltage .. Input/Output, Input/Case, Output/Case	1500VDC min.
Isolation Resistance	10 ⁷ Ohms min.
Isolation Capacitance	1000pF typ.
Switching Frequency	48Vin 250KHz typ.
	24Vin 220KHz typ.
Operating Case Temperature	-40°C to 100°C
Storage Temperature Range	-40°C to +105°C
Thermal Shutdown, Case Temp.	110°C typ.
Dimensions	1.45 x 2.28 x 0.50 inches(36.8 x 57.9 x 12.7 mm)
Humidity	95% RH max. Non condensing
MTBF	MIL-STD-217F, GB, 25°C, Full Load 600Khrs typ.
Case Material	Aluminum Base-plate with Plastic Case
Weight	66g

NOTE :

1. Measured From High Line to Low Line
2. Measured From Full Load to min. Load
3. The output noise is measured with 10uF tantalum capacitor and 1uF ceramic capacitor across output
4. Logic Compatibility Open Collector ref to -Input
 Module ON >3.5Vdc to 75Vdc or Open Circuit
 Module OFF < 1.2Vdc
5. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF
 Module ON < 1.2Vdc
 Module OFF >3.5Vdc to 75Vdc or Open Circuit
6. Trim-up connect a resistor between the trim pin and +Sense
 Trim-down connect a resistor between the trim pin and -Sense
7. Suffix "-C" to the Model Number with Clear Mounting Insert(3.2mm DIA.)
8. An external input capacitor 47uF for 48Vin models and 100uF for 24Vin models are recommended to reduce input ripple voltage.

SIZE QB Dimensions:

All Dimensions In Inches(mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

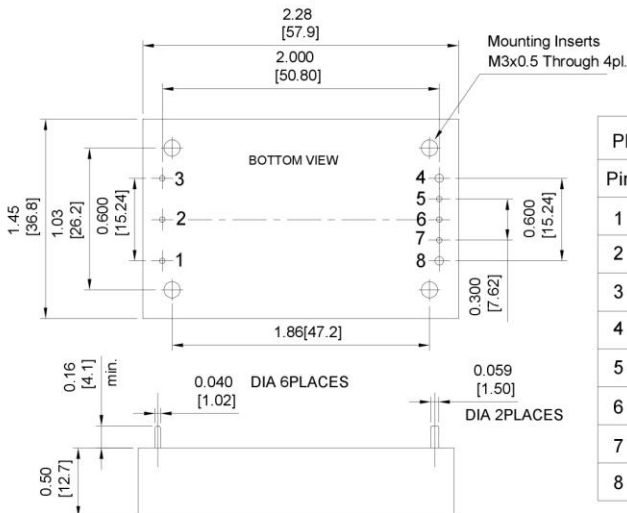

EXTERNAL OUTPUT TRIM

