



**100W Open Frame type Non-Isolation DC to Dc power supply > NID100**



■ Features :

- Economical open frame design
- Wide input range
- High efficiency up to 97%
- Remote ON / OFF control
- Compact size 2.0"x1.082"x 0.472"(SIP package)
- Protections: Short circuit / Overload / Over voltage
- -30~+85°C wide working temperature
- Cooling by free air convection
- Comply to EN55032 ClassA without additional components
- Trimming output (optional)
- 3 years warranty



**SPECIFICATION**


ORDER NO.	NID100-5		NID100-12		NID100-15		NID100-24			
OUTPUT	DC VOLTAGE	5V		12V		15V		24V		
	RATED CURRENT	11A		7.5A		6.5A		4.2A		
	RATED POWER	55W		90W		97.5W		100.8W		
	RIPPLE & NOISE (max.) Note.2	100mVp-p		120mVp-p		150mVp-p		200mVp-p		
	LINE REGULATION Note.3	±0.5%		±0.5%		±0.5%		±0.5%		
	LOAD REGULATION Note.4	±0.5%		±0.5%		±0.5%		±0.5%		
	VOLTAGE TOLERANCE	±2.0%		±2.0%		±2.0%		±2.0%		
	SWITCHING FREQUENCY (Typ.)	200KHz								
EXTERNAL CAPACITANCE LOAD (max.)	100uF/16V low ESR		68uf/25V low ESR		47uf/50V low ESR		47uf/50V low ESR			
INPUT	VOLTAGE RANGE		10.5 ~ 53VDC		20 ~ 53VDC		20 ~ 53VDC		30 ~ 53VDC	
	NORMAL VOLTAGE		24VDC (or 48VDC)		24VDC (or 48VDC)		24VDC (or 48VDC)		48VDC	
	EFFICIENCY (Typ.)	24Vin	93% (12/24VDC)		96%		97%		-----	
		48Vin	92%		95%		95%		96%	
	DC CURRENT	Full load	5400mA/12VDC		4500mA/24VDC		4600mA/24VDC		2300mA/48VDC	
No load		20mA		30mA		30mA		50mA		
PROTECTION		Fuse recommended (8A)								
PROTECTION	OVERLOAD (Typ.)		120 ~ 300% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed							
	OVER VOLTAGE		6.4 ~ 7.5V		15.6~ 18V		17.5~ 21V		28~ 33V	
	SHORT CIRCUIT		All output equipped with short circuit Protection type : Shut off o/p voltage, clamp by TVS diode							
	REMOTE CONTROL		Power on : 1.2VDC < R.C ~ com < 12VDC or open circuit ; power off : R.C ~ com < 0.4VDC or short circuit (PIN5,6,7,8 & PIN13)							
ENVIRONMENT	SAFETY STANDARDS		EAC TP TC 004 approved							
	WORKING TEMP.		-30 ~ +85°C (Refer to "Derating Curve")							
	WORKING HUMIDITY		20% ~ 85% RH non-condensing							
	STORAGE TEMP.		-30 ~ +105°C							
	TEMP. COEFFICIENT		±0.03% / °C (0 ~ 50°C)							
	VIBRATION		10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARD		EN62368-1(LVD)							
	EMC EMISSION	Parameter	Standard		Test Level / Note					
		Conducted	EN55032		Class A without external components, Class B with external components					
		Radiated	EN55032		Class A without external components, Class B with external components					
	EMC IMMUNITY	Parameter	Standard		Test Level / Note					
		Radiated	EN61000-4-3		Level 2, 3V/m ; criteria A					
		EFT / Burst	EN61000-4-4		Level 2, 1KV ; criteria A					
Surge		EN61000-4-5		Level 2, 1KV/Line-Line, criteria A						
Conducted	EN61000-4-6		Level 2, 3V ; criteria A							
OTHERS	DIMENSION		50.8*27.5*12mm or 2.0**1.082**0.472" inch (L*W*H)							
	WEIGHT		35g;280psc/10.8Kg/0.94CUFT							
NOTE	1.All parameters are specified at normal input, rated load, 25°C 70% RH Ambient. 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 10% to 100% rated load.									



**100W Open Frame type Non-Isolation DC to Dc power supply > NID100**


■ Connection diagram to obtain negative output voltage

Note: input voltage must be < 30VDC.

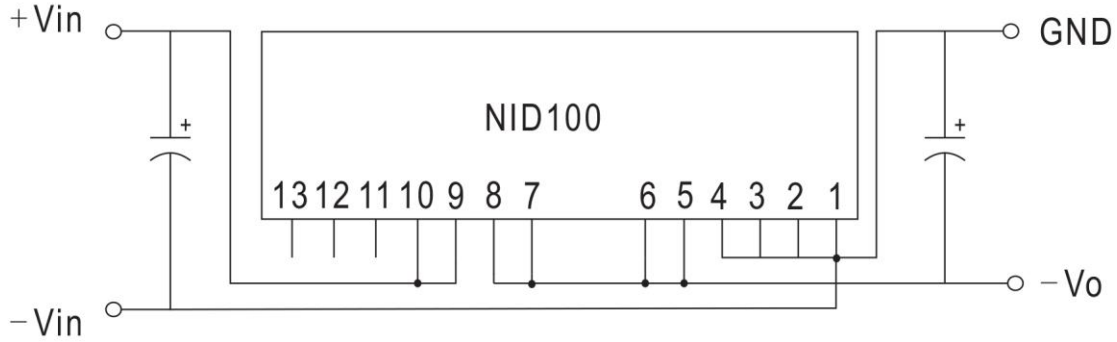


■ Derating Curve


NID100-5V

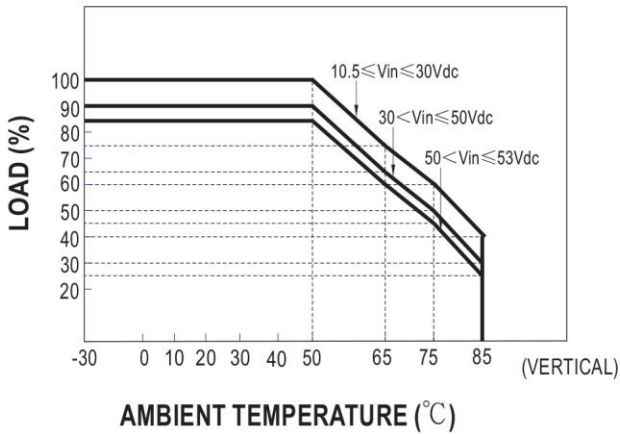

NID100-12V,15V

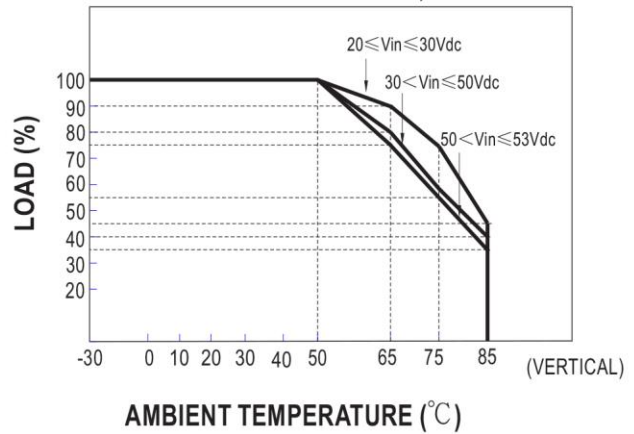

NID100-24V

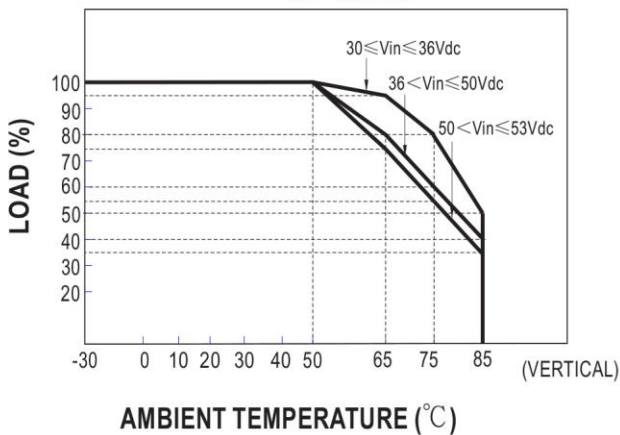



E-Star Power Development Co., Ltd. (E-STAR)


1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
22069, Taiwan (R.O.C.)

Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**100W Open Frame type Non-Isolation DC to Dc power supply > NID100**

**Mechanical Specification**

Unit:mm(inch)

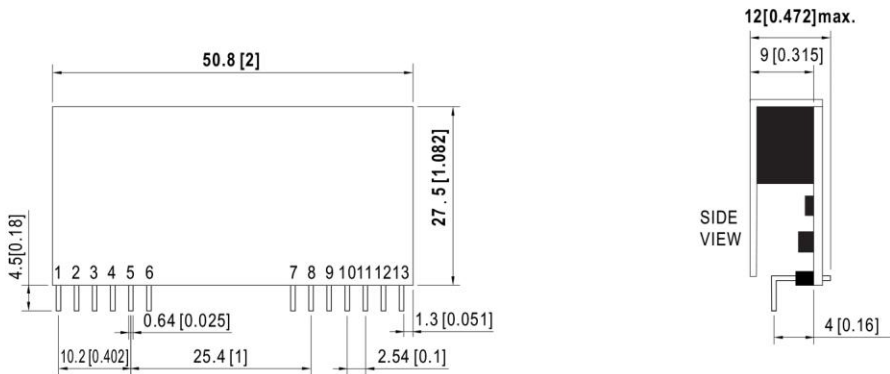


**Pin Configuration**

Pin No.	Pin_Out
1,2,3,4	+Vout
5,6,7,8	Com
9,10	+Vin
11	N.C.
12	Trim(optional)
13	R.C.

**EMC Suggestion Circuit**

※Comply to EN55032 Class A without additional componenets ,required external componenets to meet Class B emissison are as below:

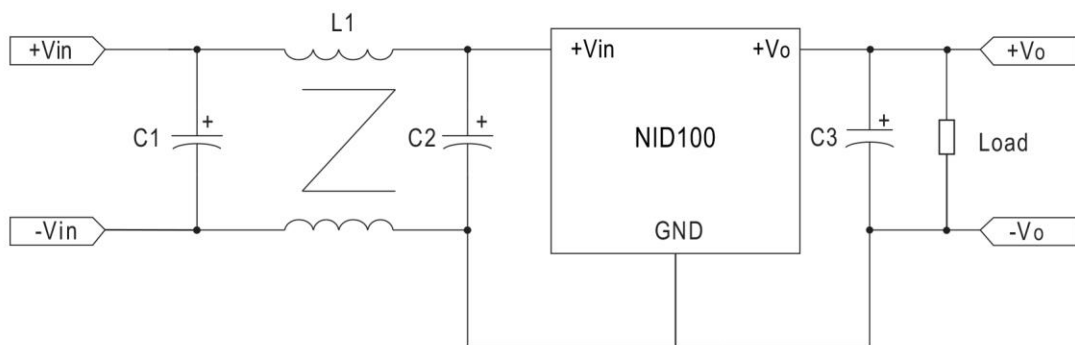

C1/C2	L1	C3
120 $\mu$ F/63V	15 $\mu$ H(NiZn)	22 $\mu$ F/35V