



E-Star Power Development Co., Ltd. (E-STAR)
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City
 22069, Taiwan (R.O.C.)
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

40W Wall Mount Power Supply < PA1045-HBA

FEATURES

Over-Voltage Protection
Over-Current Protection

Limit current Protection(Optional)

Short-circuit Protection
100%Hi-pot & ATE(Chroma)Tested

100%Burn-in under High
Ambient Temperature(45℃)


Low Ripple/Noise
MTBF Above 50000 HRS At 25℃

LVD authentication
Limited Power Sources(LPS)

CEC IV and V Efficiency
Regulations Compliance

Cispr 22 CLASS B,VCCI CLASS B,
FCC Part15 CLASS B, Compliance

PA1045 HB Series Wall Mount 3PIN/Horizontal Type For BRIATIN

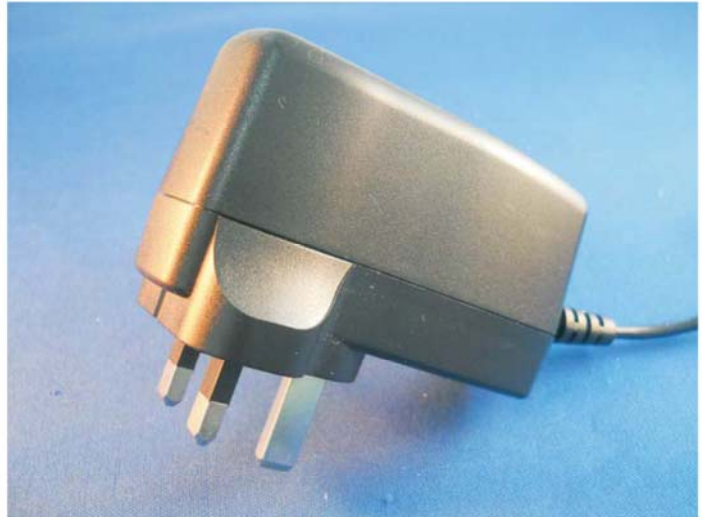

SPECIFICATION

Model No	PA1045-XHBA	PA1045-XHBA	PA1045-XHBA	PA1045-XHBA
Part No	PA1045-120HBA~ PA1045-189HBA	PA1045-190HBA~ PA1045-240HBA	PA1045-241HBA~ PA1045-360HBA	PA1045-361HBA~ PA1045-480HBA
Item				
Output Voltage	12V~18.9V	19V~24V	24.1V~36V	36V~48V
Output Current(Max.)	3.33A	2.1A	1.66A	1.0A
Output Power(Max.)	40W	40W	40W	40W
Input Voltage	AC90~264V			
Input Frequency	47~63Hz			
Input Current	1.0A~1.5A Maximum			
Inrush Current	80A Maximum			
Line Regulation	1% Maximum			
Ripple&Noise	1% Maximum			
Load Regulation	5% Maximum			
Efficiency	≥ 86%			
Operating Temperature	0~40℃			
Storage Temperature	-20~85℃			
Over-Voltage Protection	Auto Recovery			
Short-circuit Protection	Auto Recovery			
Safety Standard	CB			
EMC(EMI/EMS)				



E-Star Power Development Co., Ltd. (E-STAR)

1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City
22069, Taiwan (R.O.C.)

Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

40W Wall Mount Power Supply < PA1045-HBA

機種編碼 Products code:

PA 1 045 - XXX HB A XXX - XXX - XX

