



E-Star Power Development Co., Ltd. (E-STAR)  
 1F., No.40, Juren Ln., Sec. 2, Sanmin Rd., Banciao Dist., New Taipei City  
 22069, Taiwan (R.O.C.)  
 Phone : 886-2-2957 5580 Fax : 886-2-2957 7473

**12W USB Charger interchangeable series > APSU12-USB**



FIG 1: American Type



FIG 2: European Type



FIG 3: Australian Type



FIG 4: British Type



FIG 5: Chinese Type





FIG 6: Korean Type




FIG 7: Argentinian Type




FIG 8: Japanese Type

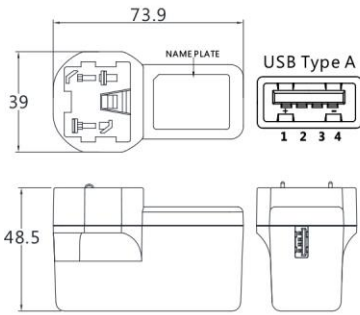


AC Plug-US




AC Plug-EU




AC Plug-SA




AC Plug-UK




AC Plug-CH



AC Plug-KR



AC Plug-AR



AC Plug-JP

■ Safety agency approvals:



FC CE CB LPS

■ Specifications:

Model No.	<b>APSU12-USB</b>
AC input range	100~240VAC; 47~63Hz; 0.4A
Leakage current	0.25mA Max.@ 240VAC/50Hz
Operating temperature	-20°C to ~+70°C(safety approval 0°C to 40°C, >40°C please contact the sales request derating curve.)
Withstand voltage	4242VDC from input to output
EMC	(A)CE EN 55032,EN 55024 (B)FCC 47 CFR Part 15 Subpart B
Safety	(A) UL/cUL (B) TUV/GS (C) TUV/PSE (D) CB
Warranty	1 year

■ **X= UI:** (American type\_FIG 1) or **EI:** (European type\_FIG 2) or **SAI:** (2pin Australian type\_FIG3) or **BSI:** (British type\_FIG 4) or **CHI:** (Chinese type\_FIG 5) or **KRI:** (Korean type\_FIG 6) or **ARI:** (Argentinian type\_FIG 7) or or **JPI:** (Japanese type\_FIG 8)

Model name	Output Voltage(VDC)	Output Current(A)	Max.Output power(W)	Ripple.(mV) max.	Line Regulation(%)	Load Regulation(%)	Avg.Eff.(%) DoE(VI)_CoC(5)	No load Power Consumption(W)	Measured at the output of
APSU12X-1-USB	5	2.40	12	100	±1	± 5	>79.94	<0.1	5

Note:  
 1.Weight: Approx 100~120gs  
 2.Avg. Eff.(%): Averages the efficiency at 25, 50, 75, and 100 % of max. rated output current.